


TGC302

Unbalanced instrument cable - flex 0.22 mm² - 24 AWG



Inner Conductors:

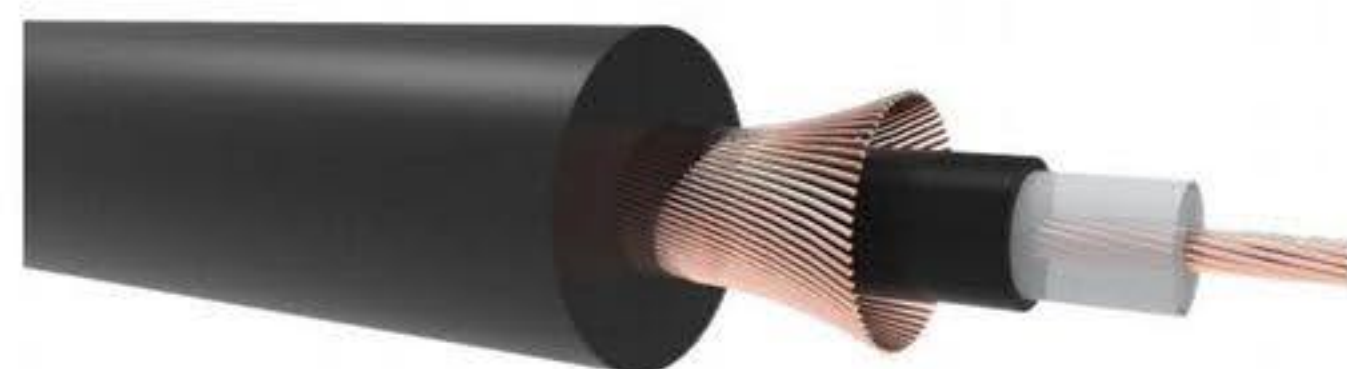

Usage:

MOBILE

STAGE

Shielding:



Physical Characteristics:

Inner conductor	Insulation	Material	FPE 1.8 mm (Ø)
	Shielding1	Spiral	BC 64 x 0.10 mm (Ø) (OFC)
	Shielding2	Conductive PVC	
Outer jacket	Material		Flexible PVC 6 mm (Ø)
	Colours		Black
Type of cable			24 AWG Instrument cable
Inner conductor	Material		BC 20 x 0.12 mm (Ø) (OFC)
	Section		0.23 mm ²
	Number of conductors		1

Mechanical Characteristics:

Temperature range	Fixed installation	- 40 °C till + 80 °C
	Flexible installation	- 25 °C till + 70 °C
Bending radius	Fixed installation	6 x outer diameter
	Flexible installation	8 x outer diameter

Cross sections:

